



R/W Electrode (pd)



# 견적서

수신 : 서울대학교 산학협력단귀중

견적 번호 : NIQ-180606

참조 : 장상철 님

견적 일자 : 2018년 6월 5일

YOUR REF. :

TEL. 010-8072-8008

FAX.

(주) 엔아이텍

경기도 성남시 분당구 성남대로 69

로드랜드이지타워 704호

대표이사 손원희

(사업자 등록 번호 : 129-86-63353)



항목	품명	수량	규격	단가	금액
<b>Accu-Glass Products</b>					
1	24AWG Kapton Insulated Coaxial Cable - <u>2kVDC/4.5Amps</u> - <u>15 feet(=4.57meter) length</u>	9	100710	100,000	900,000
2	26AWG <u>50 Ohm Kapton Insulated Coaxial Cable</u> - <u>10kVDC/3Amps</u> - <u>15 feet(=4.57meter) length</u>	9	100720	170,000	1,530,000
					<부가세 별도 금액>

1. 가격 조건 : 귀 교 납품 인도 조건
2. 납품 기일 : 발주일로부터 2~3주
3. 지불 조건 : 귀 교 정기 결제
4. Packing : Standard Export Packing
5. Validity : 견적일로부터 30일
6. Remarks :

## 26 AWG, 50 Ohm Coaxial Cable



Wire OD:2.3mm

26 AWG, 50 Ohm Kapton Insulated Coaxial Cable. 15' ft. long.

To receive cable in one continuous length, order multiple quantities and select 'YES' on the "One Length" option below.

### Details

Part Number	100720
Stock Level	In Stock
Weight	0.10 lbs
<b>Price:</b>	<b>\$130.00</b>

### Options

One Length?	<input type="button" value="No"/> ▾
Quantity	<input type="text" value="1"/> x 15' ft.


[▶ Add to Order](#)

[▶ Add to RFQ](#)

### Specifications

Model Number	TYP6-15'
Materials	Kapton, Ag-plt Cu
RoHS Compliant	Yes
Max. Bake Temperature	250°C
Max. Operating Temperature	250°C
Max. Vacuum Level	1x10 <sup>-10</sup> Torr
Wire Gauge	26 AWG
Voltage rating	10 kVDC
Current rating	3 AMP
Resistance	159.0 Ω/km at 20°C max.
Capacitance	95 pF/m
Minimum Bend Radius, Long-Term	0.525"

## 24 AWG - Shielded Cable

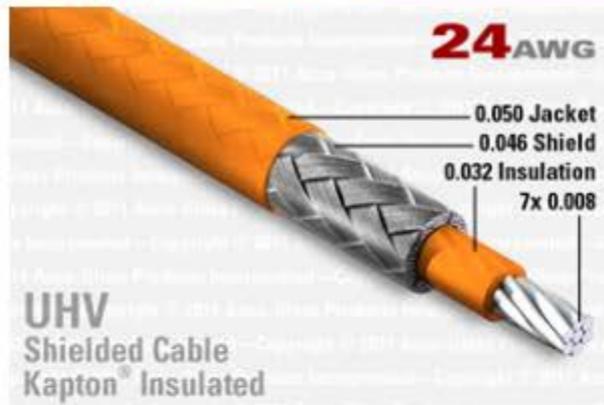

Wire OD: 1.27mm

24 AWG, Kapton Insulated Shielded Cable. 15' ft. long.

To receive cable in one continuous length, order multiple quantities and select 'YES' on the "One Length" option below.

### Details

Part Number	100710
Stock Level	In Stock
Weight	0.10 lbs
<b>Price:</b>	<b>\$75.00</b>

### Options



One Length?	<input type="button" value="No"/> ▾
Quantity	<input type="text" value="1"/> x 15' ft.

[▶ Add to Order](#)

[▶ Add to RFQ](#)

### Specifications

Model Number	TYP5-15'
Materials	<u>Kapton, Ag-plt Cu</u>
RoHS Compliant	Yes
Max. Bake Temperature	250°C
Max. Operating Temperature	250°C
Max. Vacuum Level	<u>1x10<sup>-10</sup> Torr</u>
Wire Gauge	24 AWG
Voltage rating	<u>600 VAC, 2 kVDC</u>
Current rating	4.5 AMP
Resistance	88.3 Ω/km at 20°C max.
Capacitance	300 pF/m
Minimum Bend Radius, Long-Term	0.50"
Other Information	Non-Impedance Matched

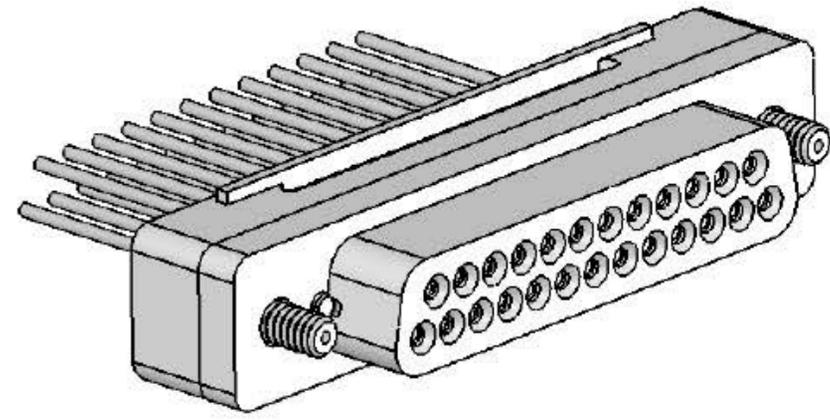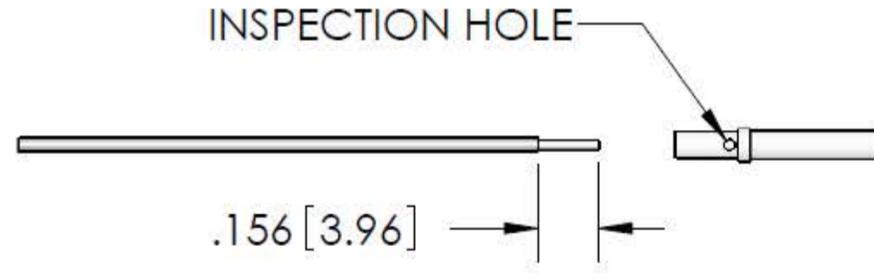

APPLIES TO:

No. OF PINS	PLUG P/N	WIRE SIZE AWG
9	FA13603	20
15	FA13604	20
25	FA13605	20
50	FA13606	20
62	FA17947	22

# 현대 SST

## HYUNDAI SST

---

TO : 서울대학교  
ATTN : 장 상 철 연구원님

PAGE : 1  
DATE : JUNE 08, 2018  
REF NO. : HD-18378

---

1. 귀교의 일익 번창을 기원 합니다.
2. 미국 SOLID SEALING TECHNOLOGY 사의 VACUUM FEEDTHROUGH 관련하여 최종 QUOTATION을 송부 하오니 검토 후 선처 바랍니다.

### QUOTATION

DESCRIPTION : CRIMP TOOL

NO.	PART NO.	Q'TY	UNIT PRICE	AMOUNT	S/D
1.	FP13347 CRIMP TOOL GAGE RANGE 0.025 INCH - 0.075 INCH	1SET	₩520,000.-	₩520,000.-	3 WEEKS

TOTAL AMOUNT : ₩520,000.-

DELIVERY : ABOUT 3~4 WEEKS FROM FACTORY AFTER RECEIPT OF YOUR ORDER

가격조건 : 귀교도착도(택배), VAT 별도

결제조건 : 납품 시 현금

MFR : SOLID SEALING TECHNOLOGY INC./USA

NOTE : 첨부도면 반드시 참조바랍니다.  
납기는 통상적인 납기로 본사 확인이 필요합니다. 납기가 들어오는대로 바로 확인 드리겠습니다.

현대에스에스티


황 종 배

---

현대 SST

RAEMIAN 105-402,  
77, HWANGSONG-RO, JUNGWON-GU,  
SEONGNAM-SI, GYEONGGI-DO, 13165 KOREA  
HOMEPAGE : www.solidsealing.com

TEL : (031) 748-7890  
(031) 733-3484  
FAX : (031) 733-3424  
E-MAIL: jbhwang1@naver.com

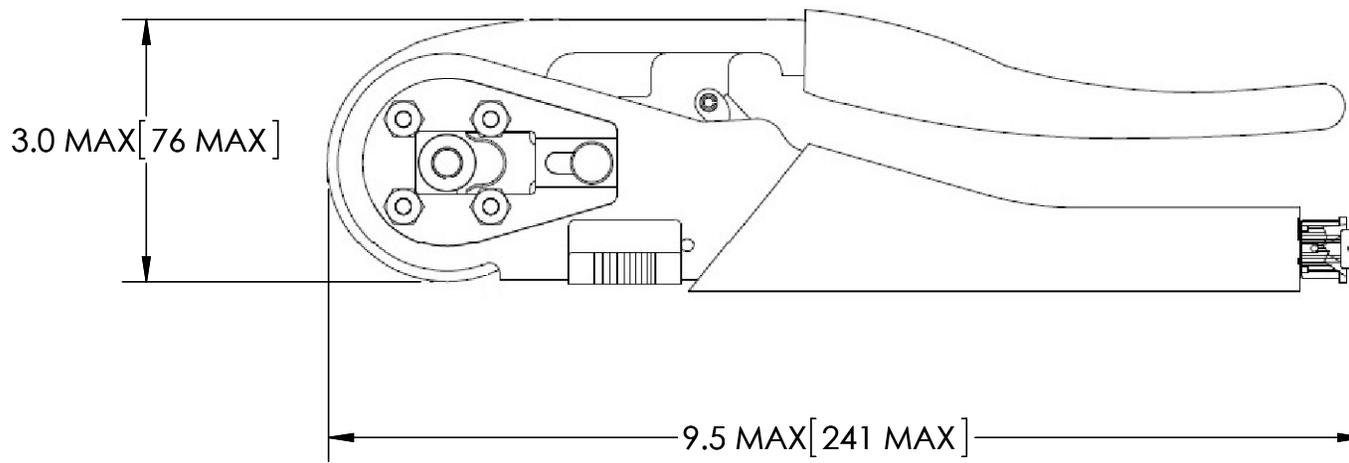

FOR USE WITH GAGE RANGE: .025"-.075"

WWW.SOLIDSEALING.COM




SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. FP13347SL REV. A1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:


CRIMP TOOL

PART NO. FP13347 REV. A


REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	JS	10/16/2013
A1	JS	10/17/2013	ACNPO003-02		ENG APPR.	JS	10/17/2013

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**




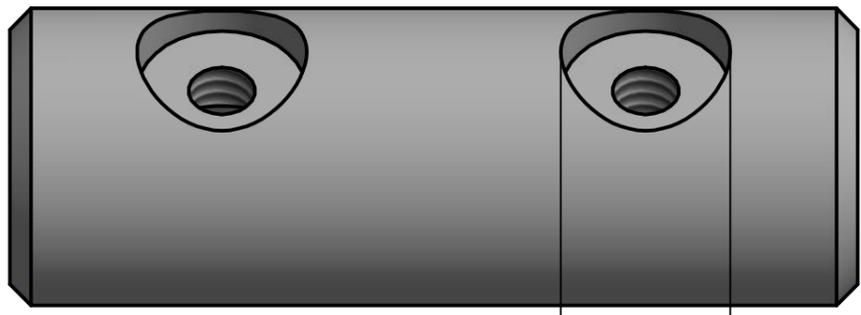

4,00

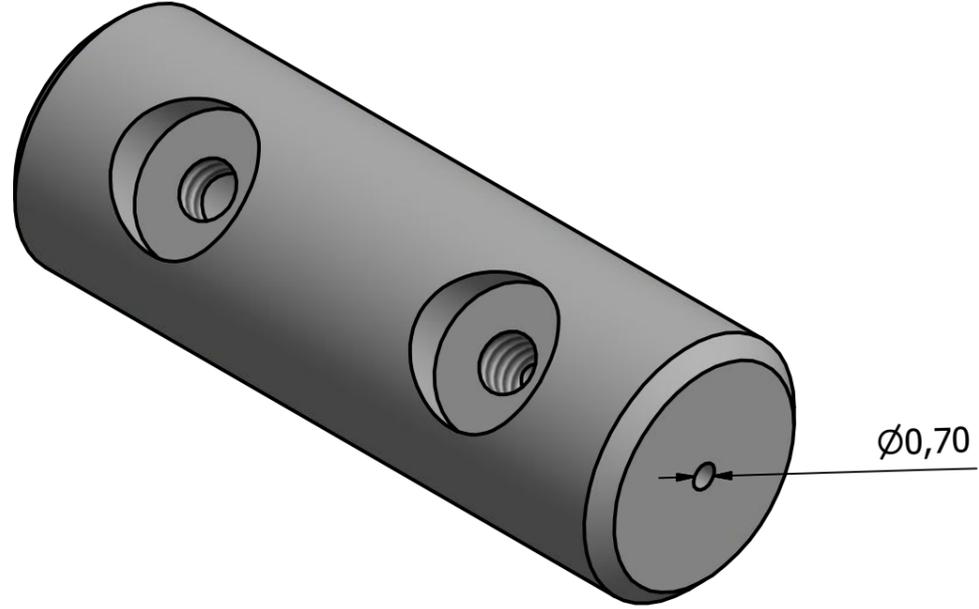

$\phi 0,70$

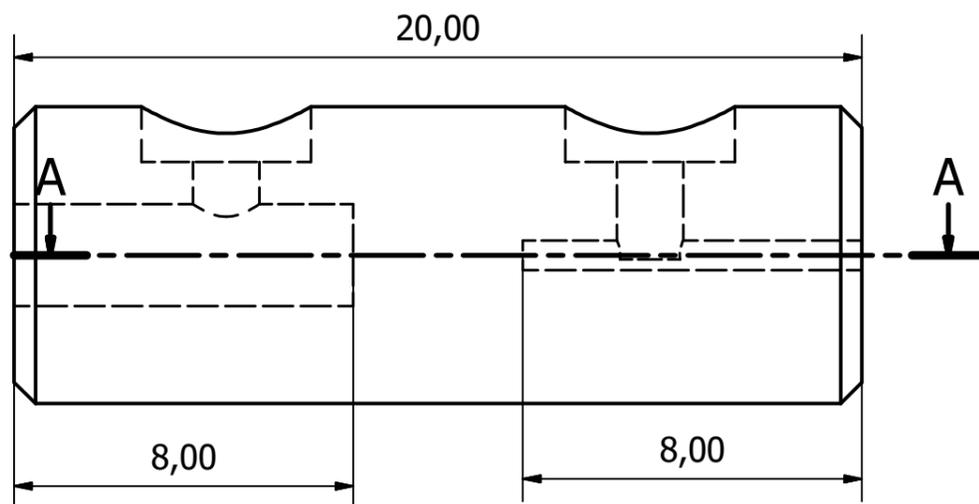


20,00

8,00


8,00

### Barrel clamp multi view

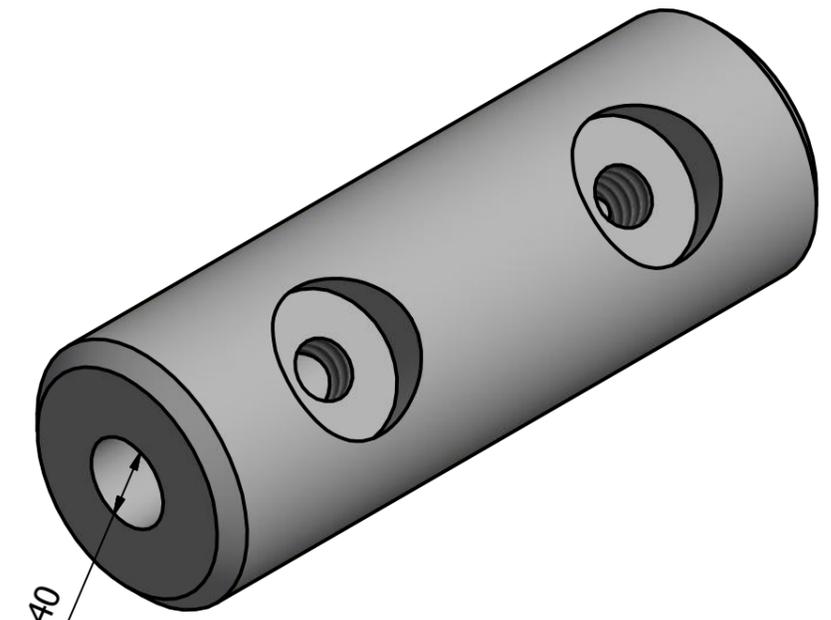

$\phi 2,40$

A-A ( 6 : 1 )

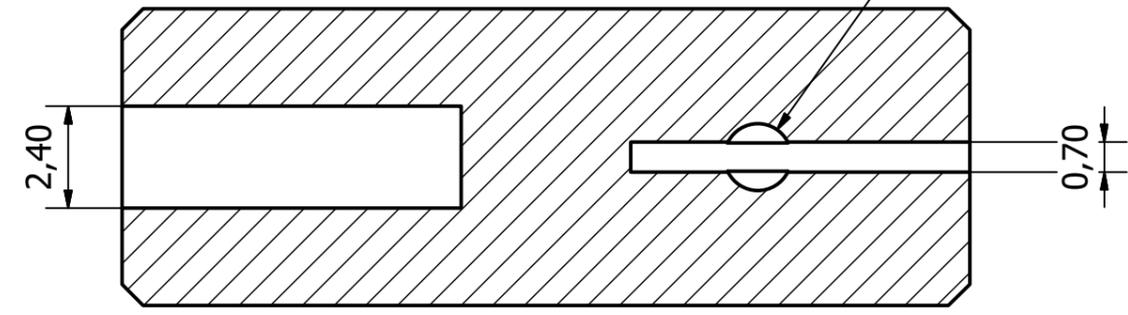

M2x0,4 - 6H  
 $\perp \phi 4,00 \nabla 1,30$

2,40

0,70

설계자	점검자	승인자	날짜	날짜	
User				2018-06-04	
			에디션		용지
					1 / 1