

■사업자번호:132-81-89320 ■주소:경기 성남 중원 상대원 190-1 SK테크노센터 메가동 514호 ■업태:제조 ■종목:전자부품 ■대표자:박 광 남



▼ 하기와 같이 샘플 견적합니다. (유효기간 : 견적일로부터 4주)

합계/Total (VAT별도)	일금			₩	-
내용/DESCRIPTIONS	수량/Q'TY	단가/UNIT COST	합계/COST	비고/REMARKS	
1	P/N : KAP-LACK-CK-D-040	20	₩ 24,400	₩ 488,000	1pcs = 1M MOQ = 20M

Polyimide(Kapton)-enameled wire, UHV suitable,  
solid copper wire, Ø 0.40 mm,  
insulated with polyimide enamel,  
Max. 2 kV DC / 4 A,  
Total-Ø 0.44 mm,  
Wire gauge AWG 26 (0.14 mm<sup>2</sup>)

- Supplied cable quantities are subject to a tolerance of +/- 5%. -269 °C to 260 °C

2	P/N : KAP-LACK-CK-D-060	20	₩ 25,800	₩ 516,000	1pcs = 1M MOQ = 20M
---	-------------------------	----	----------	-----------	------------------------

Polyimide(Kapton)-enameled wire, UHV suitable,  
solid copper wire, Ø 0.63 mm,  
insulated with polyimide enamel,  
Max. 2 kV DC / 6 A,  
Total-Ø 0.68 mm,  
Wire gauge AWG 22 (0.34 mm<sup>2</sup>)

- Supplied cable quantities are subject to a tolerance of +/- 5%. -269 °C to 260 °C

3	P/N : KAP-BAND-CK-D-040	20	₩ 22,400	₩ 448,000	1pcs = 1M MOQ = 20M
---	-------------------------	----	----------	-----------	------------------------

Polyimide(Kapton) solid core wire, UHV compatible,  
Solid silver-plated copper wire, Ø 0.40 mm,  
insulated with wrapped polyimide film,  
Max. 1 kV DC / 3 A,  
Max. total-Ø 0.76 mm,  
Wire gauge AWG 26 (0.14 mm<sup>2</sup>)

- Supplied cable quantities are subject to a tolerance of +/- 5%. -75 °C to 250 °C

소계 / SUB TOTAL					
부가세 / V.A.T			₩	-	
합계 / TOTAL			₩	-	

REMARK

- (1) 지불조건: 선입금
- (2) 상기 견적은 VAT별도이며, 귀사까지 납품 조건입니다.
- (3) 선적횟수는 추후 협의 됩니다.
- (4) 스펙 변동시 단가 변동 있습니다.
- (5) 납기일은 추후 협의 합니다.(4~5주 이내)

# 見 積 書

PAGE : 1  
 見積 NO : 20180720C  
 西紀 2018 年 07月 20日


장 상철님 귀하 (010-8072-8008)

서울대학교 貴中

(주) 정민실업

**금일백팔십오만원정 (VAT별도)**

진 공 과 학 연 구 소  
 VACUUM SCIENCE LABORATORY  
 UNIT OF JEONG MIN



貴社 月 日字 見積의뢰에 對하여  
 아래와 같이 見積書를 提出합니다.

납품 또는 완성기일 1달

수 도 장 소 \_\_\_\_\_

견 적 유효 기 간 \_\_\_\_\_

지 불 조 건 \_\_\_\_\_

첨 부 서 류 \_\_\_\_\_

서울시 영등포구 문래동5가 23-2

( 정민 B/D V.S.L )

Tel : (02) 871-1988,9

Fax : (02) 871-1987

대표이사 이 정 민 (인)



품 명 : Kapton Insulated Wire 외

內 譯

品 名 및 規 格	數 量	單 位	單 價	金 額
1.Kapton Insulated Wire	1	롤		350,000
-P/N .311-KAP-040-10M				
2.Kapton Insulated Wire	1	롤		350,000
-P/N.300-KAP-060-10M				
3.Kapton Insulated Wire	1	롤		550,000
-P/N.311-KAP50-10M				
4.Kapton Tube	1	ea		300,000
-P/N.312-KAP Tube-06-300				
5.Kapton Tube	1	ea		300,000
-P/N. 312-KAP Tube-05-300				

VACUUM SCIENCE LABORATORY  
 UNIT OF JEONG MIN

合 計 ₩ 1,850,000 (VAT별도)



[back to results list](#)

1 of 2

[next result](#)

[Introduction](#)

[Alphabetic list of Materials](#)

[Another search](#)

[Special Offers : 15](#)

[Search Results](#)

[Material Properties](#)

[Forms and Types](#)

[Catalogue Price PDFs](#)

[Periodic Table](#)

[Destination:](#)

[South Korea](#)

[Log in](#)

[Register](#)



## Polyimide - Tube

PI

Last updated  
20-July-2018

**IM307050**

[Print this page](#)

**Outside Diameter :** 0.55mm  
**Wall Thickness :** 0.025mm  
**Inside Diameter :** 0.5mm

If the item shown is not exactly what you require please let us know by sending us a message

Click on a price to add to shopping basket ( Prices are in GBP)

### Size

Order Code	Length	1 pc	2 pcs	5 pcs	10 pcs	20 pcs
416-372-47	100 mm	<a href="#">GBP 80.00</a>	<a href="#">GBP 92.00</a>	<a href="#">GBP 108.00</a>	<a href="#">GBP 127.00</a>	<a href="#">GBP 153.00</a>
046-560-90	200 mm	<a href="#">GBP 88.00</a>	<a href="#">GBP 103.00</a>	<a href="#">GBP 126.00</a>	<a href="#">GBP 151.00</a>	<a href="#">GBP 188.00</a>
820-124-63	500 mm	<a href="#">GBP 103.00</a>	<a href="#">GBP 125.00</a>	<a href="#">GBP 160.00</a>	<a href="#">GBP 206.00</a>	
515-580-93	1000 mm	<a href="#">GBP 121.00</a>	<a href="#">GBP 149.00</a>	<a href="#">GBP 205.00</a>		

[Print this page](#)

## Kapton® Coaxial types and Twisted Pairs for UHV

- Coaxial Kapton Wires with or without outer shield
- 50  $\Omega$  Coaxial Wire
- Shielded Twisted Pairs recommended for In-vacuum Motors
- PTFE Coaxial Wires for High Frequency applications



### Specification Coaxial types

#### Construction 311-KAPM060-COAX:

Conductor 0.6mm  $\varnothing$  (19x 0.12mm), Kapton insulation, Shield silver plated copper, Kapton insulation, ~500pF/m

#### Construction 311-KAPM025-SHIELD:

Conductor 0.23mm  $\varnothing$  (7x 0.08mm), Kapton insulation, Shield silver plated copper, blank, ~125pF/m

### Coaxial Kapton Wires for UHV Shielded Multi-strand/ High Flexibility types

OD DIAMETER	LENGTH	PART NUMBER	EURO
1.4 mm	10 m	311-KAPM-060-COAX	126,00
0.9 mm*	10 m	311-KAPM-025-SHIELD	98,00



\* no outer insulation

### 50 Ohm Coaxial types


Standard type	311-KAP50
Impedance	50 Ohm
Conductor	Silver plated Cu -7 x 0.15mm
Capacitance	115pf/m
Damping	0.1 db/m at 100MHz 1.1 db/m at 500MHz 1.9 db/m at 1GHz
Miniature type	311-KAP50S
Impedance	50 Ohm
Conductor	Silver plated Cu -7 x 0.08mm
Capacitance	120pf/m
Damping	~3 db/m at 1GHz

### 50 $\Omega$ Coaxial Kapton Wires for UHV Outer Diameter 2.3 mm

IMPEDANCE	LENGTH	PART NUMBER	EURO
50 Ohm	5 m	311-KAP50	142,00
50 Ohm	1 m	311-KAP50-1M	45,00


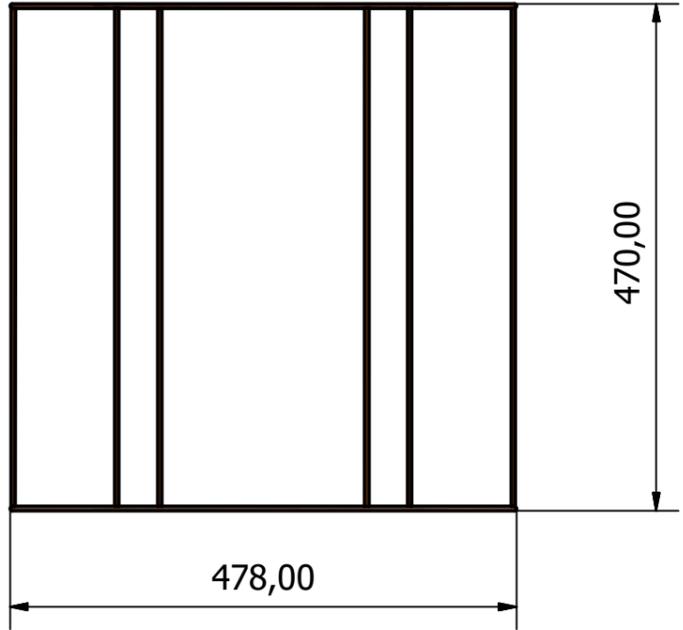
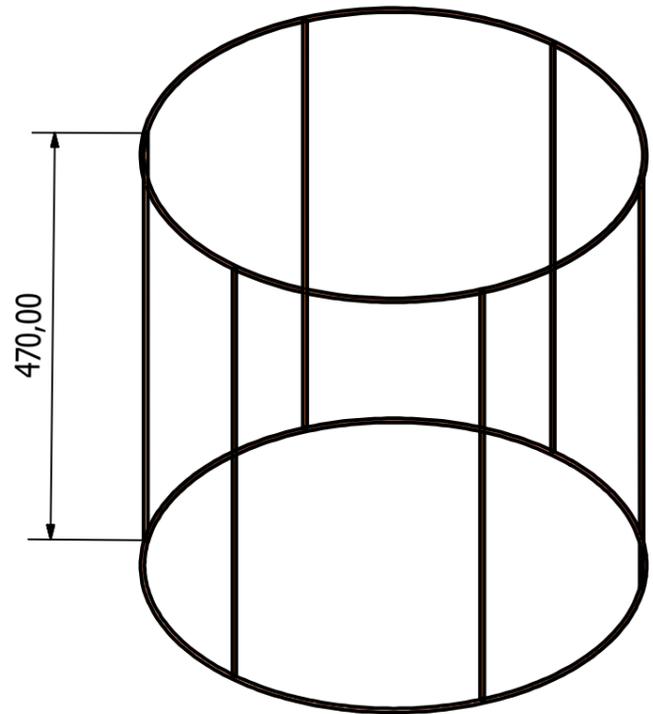


A ( 0.15 : 1 )

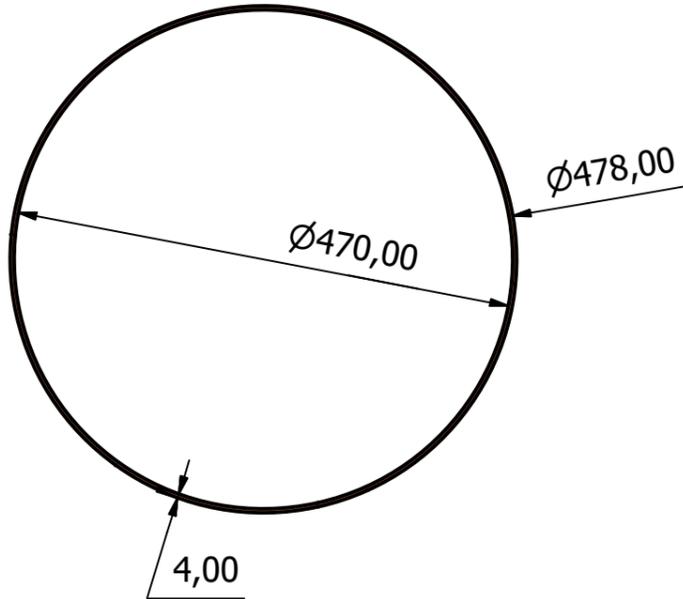

Material : SUS

설계자 User	점검자	승인자	날짜	날짜 2018-07-03	
			JIG_MRE_Stack_a	에디션 1 / 1	용지 1 / 1

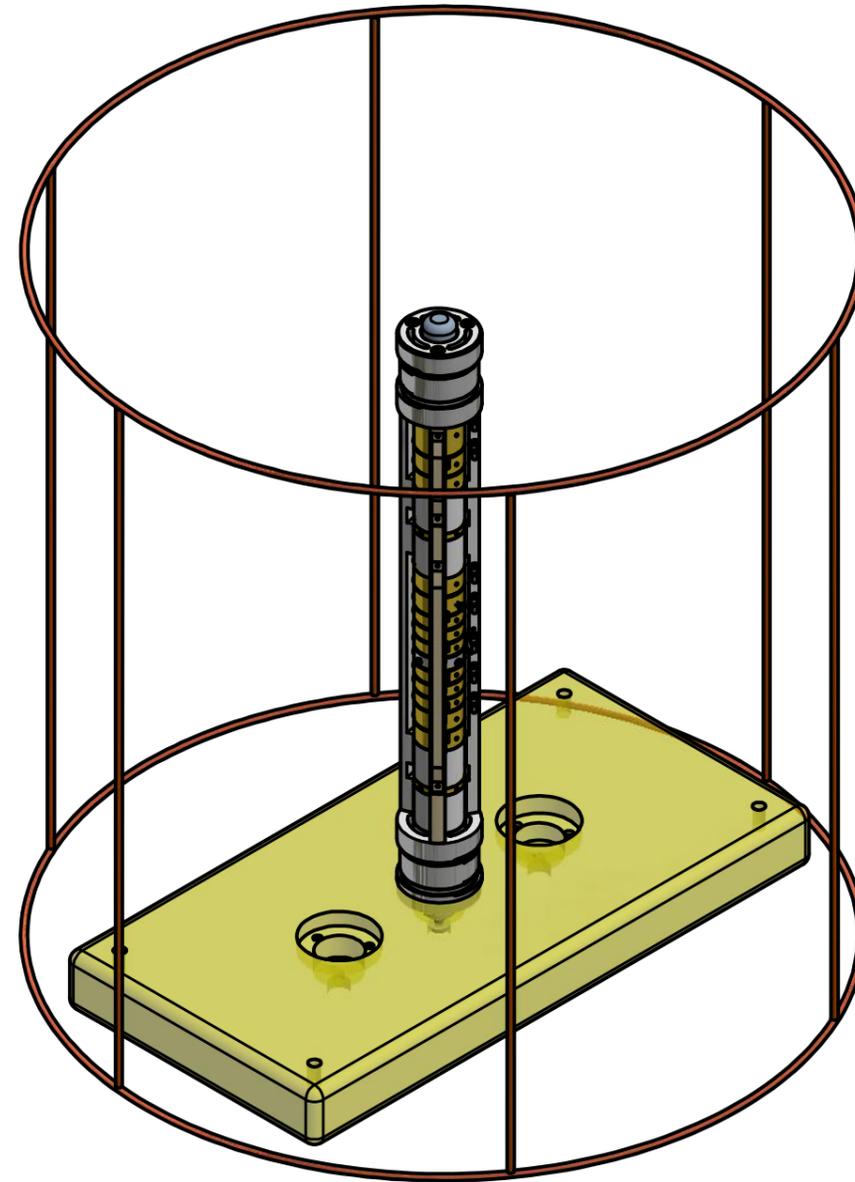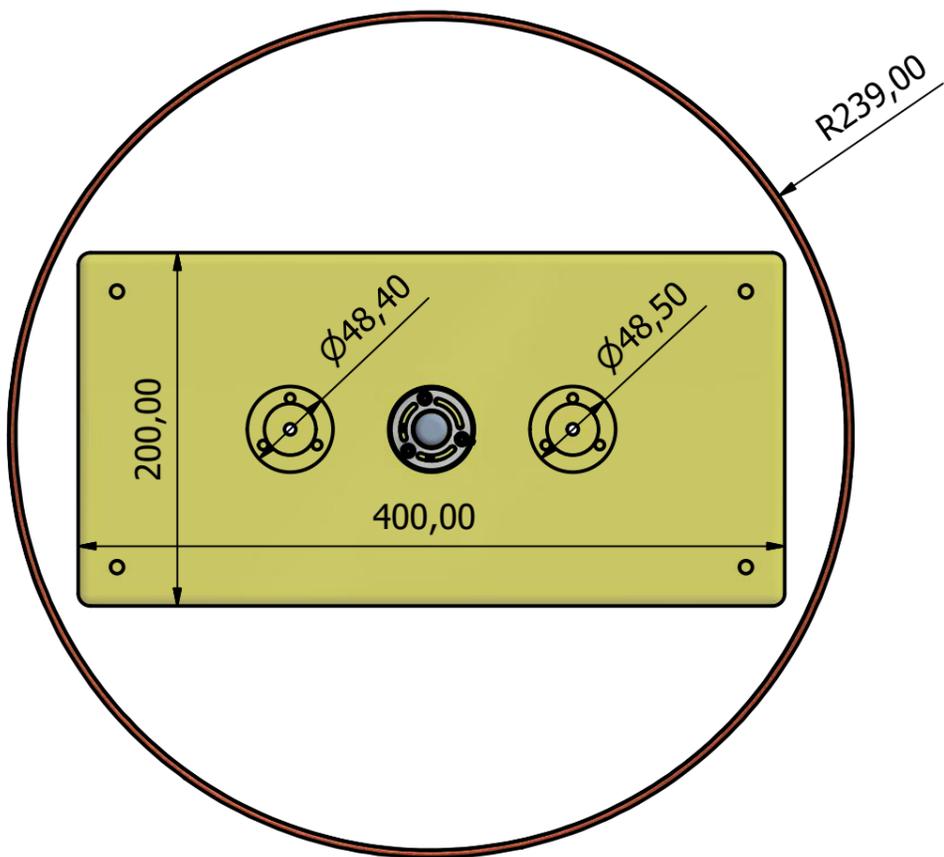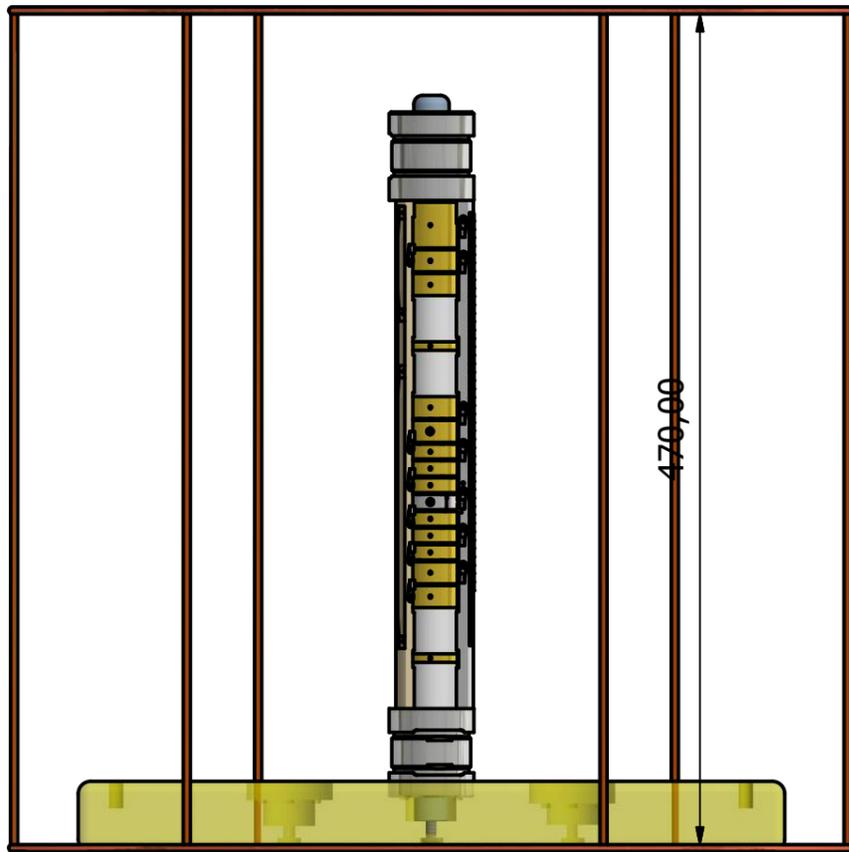

MRE JIG VIEW

설계자	점검자	승인자	날짜	날짜	
User				2018-07-04	
			JIG_MRE_Stack_C		
			에디션	용지	
			1	1 / 1	

